




# Globaltecs.

## P3 OUTDOOR SMD 3IN1 TECHNICAL PARAMETERS

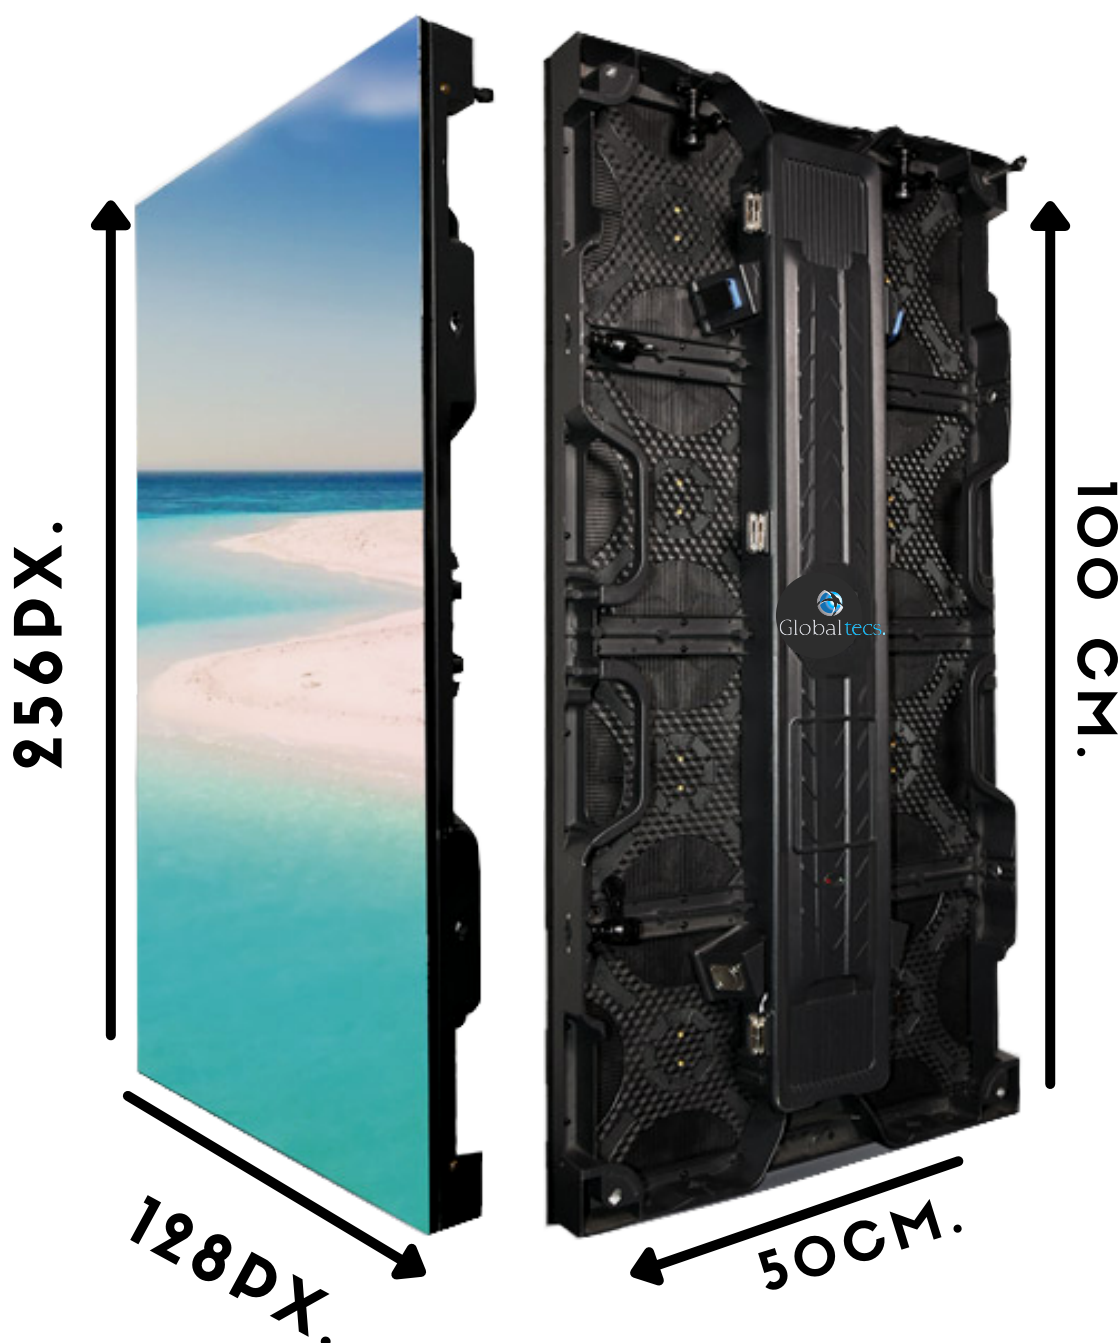

**CABINET RESOLUTION**

**CABINET SIZE**

## SPECIFICATION

## DESCRIPTION

|                         |                                                            |
|-------------------------|------------------------------------------------------------|
| Model                   | Global 3SMD                                                |
| Pixel pitch             | 3mm                                                        |
| Density                 | 65536 dots/m <sup>2</sup>                                  |
| Pixel configuration     | 1R1G1B                                                     |
| Led tipe                | Full color SMD1921 White Led                               |
| Vision Angle            | H:140°,V:140°                                              |
| Brightness              | ≥6000 Nits                                                 |
| Brightness/Adjustment   | Software regulator adjustable                              |
| Scan mode               | 1/16                                                       |
| Frequency actualization | 1,920 Hz                                                   |
| Standart cabinet size   | 500mmx1000mmx75mm                                          |
| IP Grade                | IP 65 FRONT/IP 54 BACK                                     |
| Material                | Die-Cast ALUMINIUM                                         |
| Aspect Ratio            | 16:9                                                       |
| Cabinet Weight          | 13 kg                                                      |
| Best View Distance      | 3m                                                         |
| Refresh                 | ≥3840 Hz                                                   |
| Frame Frequency         | ≥60Hz                                                      |
| Grey Scale              | Within 65536 Step                                          |
| Max power consumption   | 600 W/SQM                                                  |
| Ave power consumption   | 380 W/SQM                                                  |
| Life cycle              | 100,000 hours                                              |
| Working Voltage         | 110V/220V                                                  |
| Temperature             | -20°C to 50°C                                              |
| Humidity                | 25% to 95%                                                 |
| Signal Input Source     | Composite, S-video, Component, VGA, DVI, HDMI, SDI, HD-SDI |
| Continuous Working Time | >24 (Hrs)                                                  |
| MTBF                    | >5000 (Hrs)                                                |