




Globaltecs.

P3.9 OUTDOOR SMD 3IN1 TECHNICAL PARAMETERS

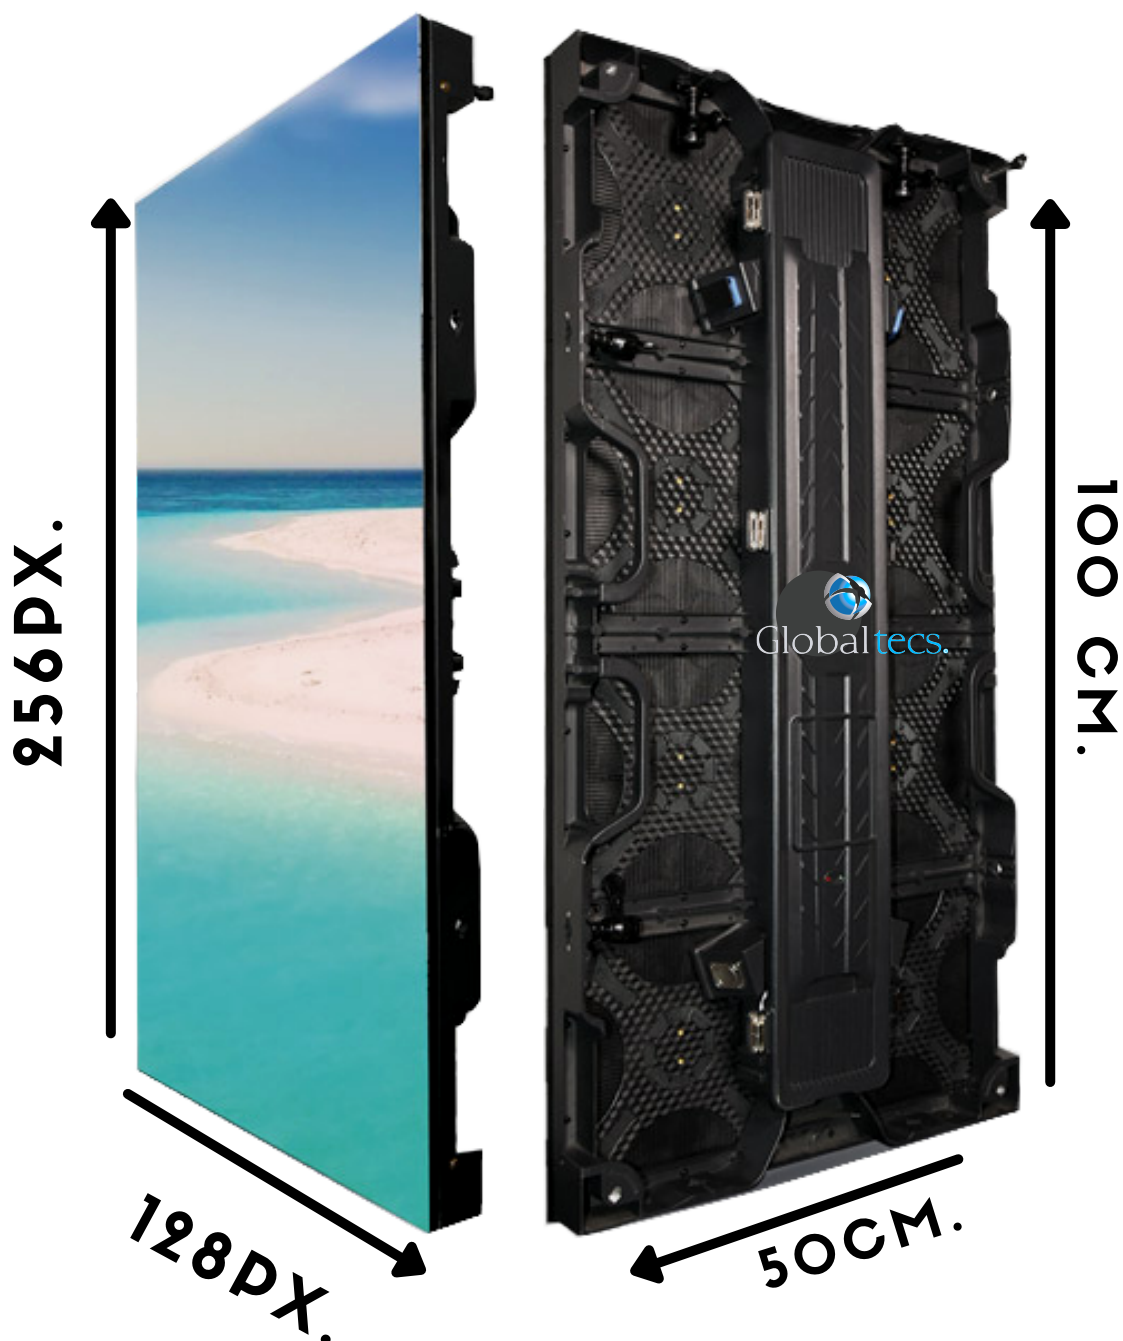

CABINET RESOLUTION

CABINET SIZE

SPECIFICATION

DESCRIPTION

Model	Global 3SMD
Pixel pitch	3.9mm
Density	65536 dots/m ²
Pixel configuration	1R1G1B
Led tipe	Full color SMD3535 White Led
Vision Angle	H:140°,V:140°
Brightness	≥4,500 Nits
Brightness/Adjustment	Software regulator adjustable
Scan mode	1/16
Frequency actualization	1,920 Hz
Standart cabinet size	500mmx1000mmx75mm
IP Grade	IP 65
Material	Die-Cast ALUMINIUM
Cabinet Weight	13 kg
Best View Distance	3m
Refresh	≥720Hz
Frame Frequency	≥60Hz
Grey Scale	Within 65536 Step
Max power consumption	600 W/m ²
Ave power consumption	200 W/m ²
Life cycle	100,000 hours
Working Voltage	220V
Temperature	-20°c to 50°c
Humidity	25% to 95%
Signal Input Source	Composite, S-video,Component,VGA,DVI,HDMI,SDI, HD-SDI
Continuous Working Time	>24 (Hrs)
MTBF	>5000 (Hrs)