




# Globaltecs.

## P4.8 INDOOR SMD 3IN1 TECHNICAL PARAMETERS

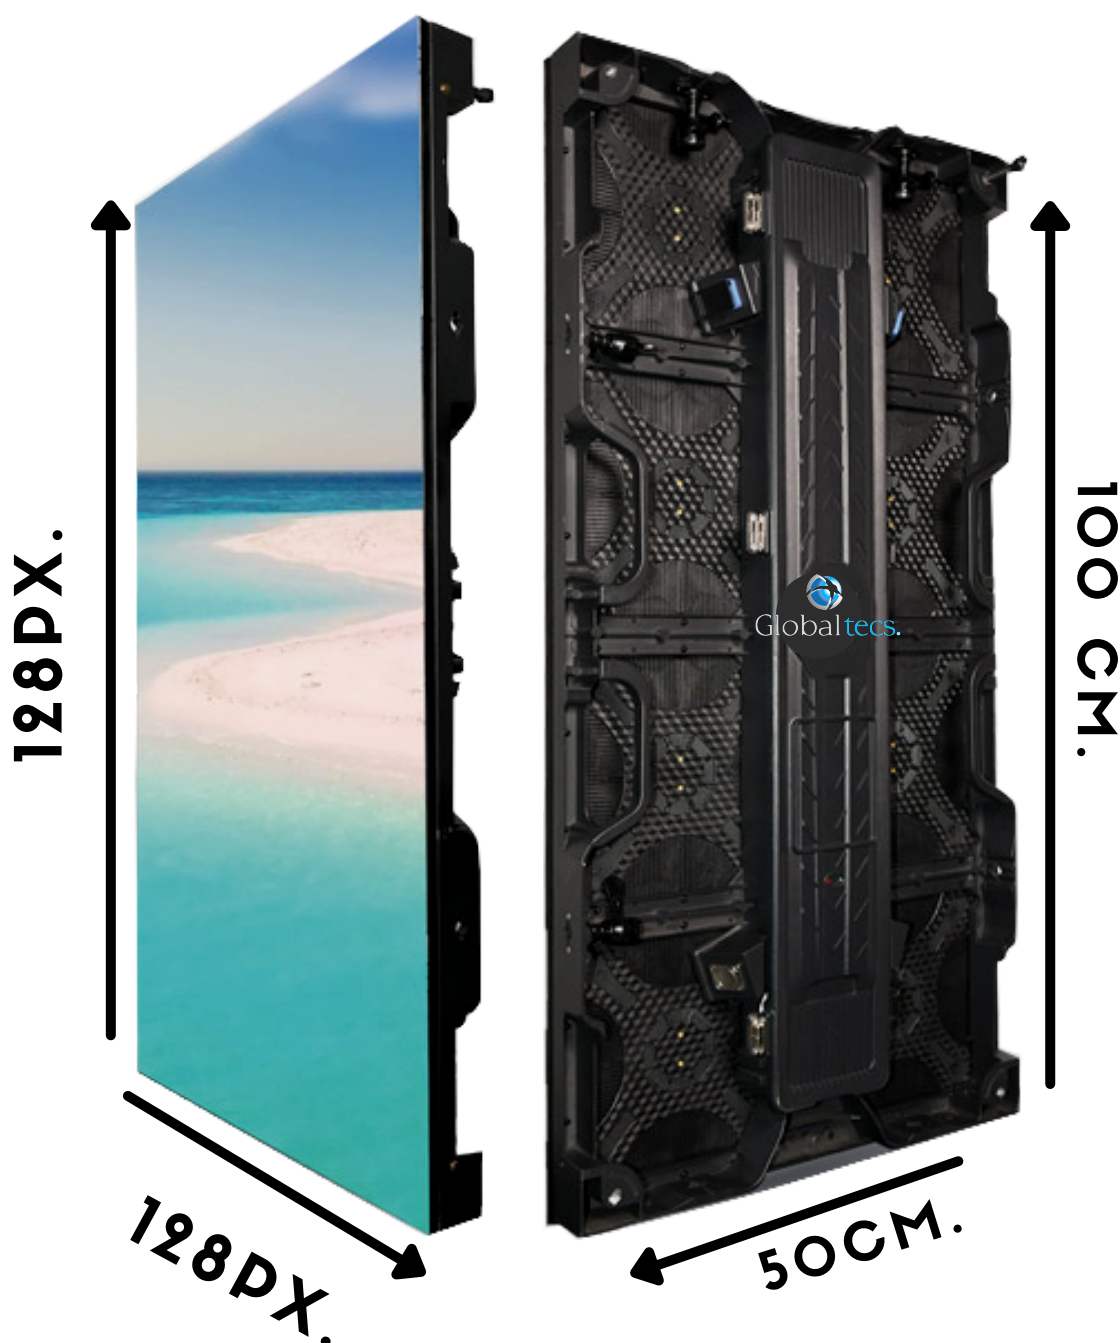

**CABINET RESOLUTION**

**CABINET SIZE**

## SPECIFICATION

## DESCRIPTION

|                         |                                                       |
|-------------------------|-------------------------------------------------------|
| Model                   | Global 4SMD                                           |
| Pixel pitch             | 4.8mm                                                 |
| Density                 | 43,264 dots/m <sup>2</sup>                            |
| Pixel configuration     | 1R1G1B                                                |
| Led tipe                | Full color SMD2121 Balck Led                          |
| Vision Angle            | H:140°,V:140°                                         |
| Brightness              | ≥1200 Nits                                            |
| Brightness/Adjustment   | Software regulator adjustable                         |
| Scan mode               | 1/16                                                  |
| Frequency actualization | 1,920 Hz                                              |
| Standart cabinet size   | 500mmx1000mmx80mm                                     |
| Cabinet resolution      | 10.806                                                |
| Material                | Die-Cast ALUMINIUM                                    |
| Cabinet Weight          | 13.75 kg                                              |
| Best View Distance      | 4m                                                    |
| Refresh                 | ≥3840 Hz                                              |
| Frame Frequency         | ≥60Hz                                                 |
| Grey Scale              | Within 65536 Step                                     |
| Max power consumption   | 600 W/SQM                                             |
| Ave power consumption   | 200 W/SQM                                             |
| Life cycle              | 100,000 hours                                         |
| Working Voltage         | 110V/220V                                             |
| Temperature             | -20°c to 50°c                                         |
| Humidity                | 25% to 95%                                            |
| Signal Input Source     | Composite, S-video,Component,VGA,DVI,HDMI,SDI, HD-SDI |
| Continuous Working Time | >24 (Hrs)                                             |
| MTBF                    | >5000 (Hrs)                                           |